

NEOREST® LS Dual Flush Toilet, 1.0 GPF / 0.8 GPF

FEATURES

- Sleek, low profile one-piece skirted Smart Bidet Toilet with integrated personal cleansing and comfort features
- Decorative metallic trim and matching remote control finish options: silver, nickel, or black
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Ultra high-efficiency TORNADO FLUSH® system - 1.0 GPF / 0.8 GPF (3.8 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Universal Height, ADA compliant
- Touchless auto open/close lid
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Gentle aerated, warm water, front and rear spray with oscillating and pulsating features
- Adjustable spray position, water temperature, and water pressure
- Instantaneous water heater for continuous warm water and energy savings
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Multifunction ergonomic stick-style remote control with personalized memory settings for up to 4 users
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Night light illuminates behind the toilet and inside of the bowl
- CLEAN LIFT® allows easy cleaning between the top and bowl unit
- Automatic and programmable energy saving systems

COMPONENTS

- SN8732M#01S - Top Unit with Silver Trim
- SN8732M#01N - Top Unit with Nickel Trim
- SN8732M#01B - Top Unit with Black Trim
- SN8732M#MBL - Matte Black Top Unit
- SN8732M#MW - Matte White Top Unit
- CT8732CUMFG - Elongated Bowl Unit

COLOR/FINISHES

- #01S Cotton with Silver Trim
- #01N Cotton with Nickel Trim
- #01B Cotton with Black Trim



- 1G** ONE GALLON PER FLUSH
- EWATER+**
- U** UNIVERSAL HEIGHT
- SD** SKIRTED DESIGN
- CEFIONTECT**
- TORNADO FLUSH**
- AUTO FLUSH**

PRODUCT SPECIFICATION

The NEOREST LS with the TORNADO FLUSH system toilet shall be 1.0 GPF / 0.8 GPF (3.8 LPF / 3.0 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model MS8732CUMFG#_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, and others
- ADA Compliant
- Complies with CA Prop 65 warning requirements



CALGreen

MS8732CUMFG

NEOREST® LS Dual Flush Toilet, 1.0 GPF / 0.8 GPF


SPECIFICATIONS

Water Use	1.0 GPF / 0.8 GPF (3.8 LPF / 3.0 LPF)
Flush System	TORNADO FLUSH®
Water Pressure	Min: 7.25 PSI (0.05MPa) Flowing Max: 108.75 PSI (0.75MPa) Static
Water Surface	8-5/8" x 7-1/4"
Trap Diameter	2" (51 mm)
Trap Seal	2-1/8" (54 mm)
Warranty	Three Year Limited (Residential) One Year Limited (Commercial)
Material	Bowl: Vitreous China Seat + Cover: Plastic
Power Rating	AC 120 V, 60 Hz, 1290 W
Power Cord	3.9 ft (1.2m)
Rear Washing	Approx. 0.08 - 0.11 gal/min
Soft Washing	Approx. 0.08 - 0.11 gal/min
Front Washing	Approx. 0.08 - 0.11 gal/min
Wide Front Washing	Approx. 0.09 - 0.11 gal/min
Washing Spray Temperature	Approx. 86°F - 104°F (30°C - 40°C)
Safety Feature	Temperature Fuse
Drying Feature	Air Temperature: Approx. 95°F - 140°F (35°C - 60°C)
Airflow Volume	8.83 ft ³ /min
Dryer Safety Feature	Temperature Fuse
Seat Warming Feature	Surface Temperature: Approx. 82°F - 97°F (28°C - 36°C)
Seat Heater Capacity	540 W
Air Purifying Feature	O2 Deodorizer
Air Volume	5.65 ft ³ /min
Ambient Temperature Range	32°F - 104°F (0°C - 40°C)
Product Size	28-1/2" L x 16-1/8" W x 20-7/8" H
Product Weight	112 lbs
Floor to Seat Height	17-5/16" (440mm)
Shipping Weight	SN8732M: 21 lbs CT8732CUMFG: 106 lbs
Shipping Dimensions	SN8732M: 32-1/8" L x 19-1/8" W x 7-7/8" H CT8732CUMFG: 30-7/8" L x 16-3/8" W x 22-3/8" H

INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.
- Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.

DIMENSIONS

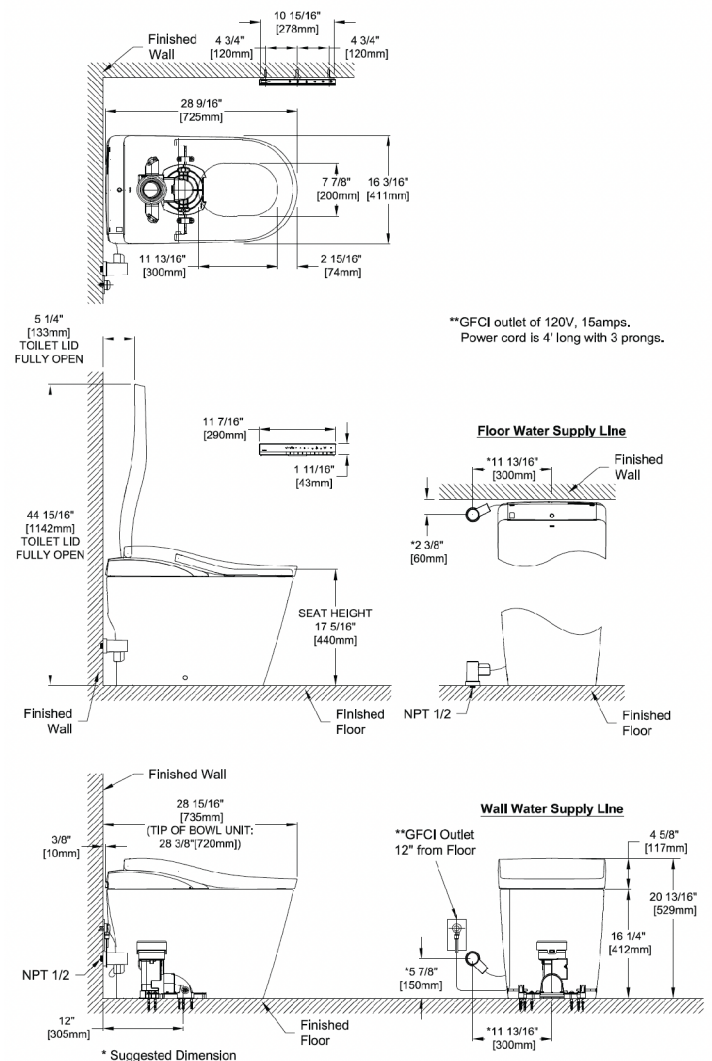

TOTO®

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

These dimensions and specifications are subject to change without notice

SS-02220 v.04