Soirée® One-Piece Toilet - 1.28 GPF

FEATURES

- TORNADO FLUSH_® utilizes 360° cleaning power to reach every part of the bowl - 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Specially designed to accommodate a WASHLET®+
- Decorative one-piece with skirted design
- Elongated front bowl and seat
- Universal Height
- Chrome plated trip lever
- 12" Rough-in

MODELS

- MS964124CEFG (#01, #03, #11, #12)
 With CEFIONTECT ceramic glaze & includes SS124
 SoftClose® seat
- MS964124CEF (#51)
 Same as MS964124CEFG without CEFIONTECT

COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #11 Colonial White
- #12 Sedona Beige
- #51 Ebony (Without CEFIONTECT glaze)

OPTIONAL COMPONENTS

- TSU03W.10R 10" Unifit Rough-In
- TSU03W.14R 14" Unifit Rough-In
- THU225(#BN, #PN, #PB)
 Trip Lever (Brushed Nickel, Polished Nickel, Polished Brass)

PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF (4.8 LPF). Toilet shall be 12" Unifit rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS964124CEF(G)____.









CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC_®), EPA WaterSense_®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when installed with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements








SPECIFICATIONS

Water Use	1.28 GPF (4.8 LPF)
Flush System	TORNADO FLUSH®
Water Surface	7-7/8" x 9-7/8"
Trap Diameter	2-1/8"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-3/16"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	MS964124CEF(G): 120 lbs
Shipping Dimensions	MS964124CEF(G) 30" L x 19" W x 29-5/8" H ¹ x 18-1/2" H ²

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

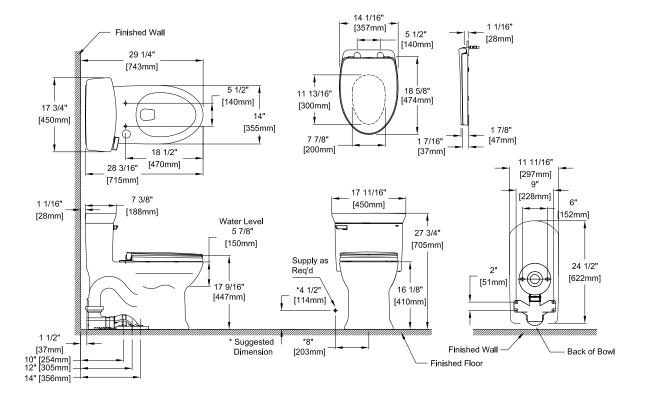



These dimensions and specifications are subject to change without notice