

AP WASHLET®+ S5

Wall-Hung Toilet - 1.28 GPF/0.9 GPF

FEATURES

AP Bowl

- Ultra high-efficiency DYNAMAX TORNADO FLUSH® system - 1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Elongated shape front bowl

S5 WASHLET

- High-tech electronic elongated bidet seat
- See spec sheet SW3446 for WASHLET features

DuoFit In-Wall Tank

- Ultra high-efficiency dual flushing system - 1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF) Avg. flush 1.03 GPF
- Adjustable 15"-19" mounting height
- Saves up to 9" of floor space compared to standard floor-mounted toilet
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper supply line

Push Plate

- YT930#MS
- Matte Silver Basic Round Push Plate

MODELS

- **CWT4263446CMFG#MS**
AP WASHLET+ with S5
 - **CT426CFG40#01**
AP Wall-Hung Toilet
 - **WT173M**
In-Wall Tank System (Copper Pipe)
 - **SW3446#01**
S5 WASHLET+
Elongated WASHLET
 - **THU805**
WASHLET connection kit
 - **YT930#MS**
Matte Silver Basic Round Push Plate

Available Options

- YT920#WH - White Matte Basic Square Push Plate
- YT920#MS - Matte Silver Basic Square Push Plate
- YT930#WH - White Matte Basic Round Push Plate
- YT970#SS - Stainless Steel Wall Round Push Plate
- YT980#SS - Stainless Steel Wall Square Push Plate



**DYNAMAX
TORNADO FLUSH**



EWATER+



CEFIONTECT



Skirted Design



UNIVERSAL HEIGHT

COLORS/FINISHES

- #01 Cotton

CODES/STANDARDS

- Meets and exceeds:
 - Bowl: ASME A112.19.2/CSA B45.1, ASME A112.19.14
 - Carrier System: ASME A112.6.2
 - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements




SPECIFICATIONS

CWT4263446CMFG#MS	CT426CFGT40	S5	WT173M
Water Use	1.28 / 0.9 GPF		1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®		Dual flushing
Min. Water Pressure	8 psi (static)		8 psi (static)
Max. Water Pressure	108.75 psi (static)		108.75 psi (static)
Water Surface	5-1/2" X 4-1/8"		
Trap Diameter	2-1/8"		
Installation Height	15" to 19"		15" to 19"
Trap Seal	2-1/8"		
Warranty	One Year Limited Warranty	One Year Limited Warranty	One Year Limited Warranty
Material	Vitreous China		Various
Shipping Weight	68 lbs	15.4 lbs	44 lbs
Shipping Dimensions	22"L x 14.6" W x 16.5" H	24-3/8"L x 17-9/16"W x 7-7/16"H	47"L x 26-1/2" W x 5-3/4" H

See SW3446 Specification Sheet for details on included WASHLET.

DIMENSIONS

CT426CFGT40

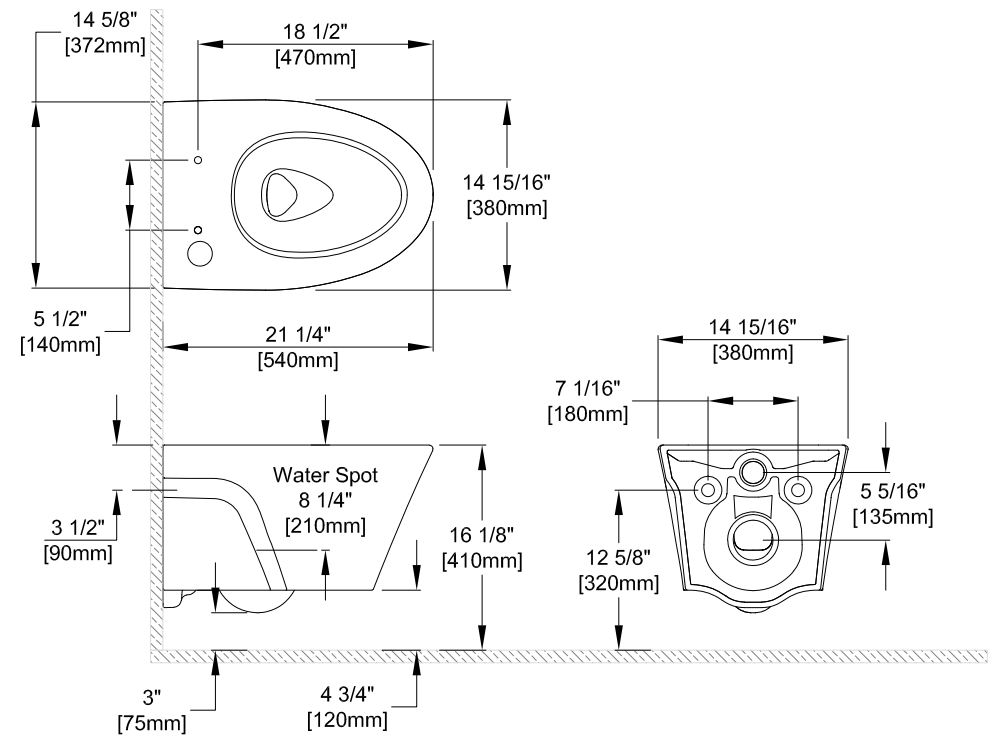

CT426CFGT40

This universal height, ultra high-efficiency DYNAMAX TORNADO flushing system toilet shall be 1.28 GPF/0.9 GPF (4.8 LPF/3.4 LPF). Toilet shall have CEFIONTECT® ceramic glaze. Toilet shall be mounted to in-wall tank system, elongated front bowl and wall-mounted push-button type trip lever. Toilet shall be TOTO Model CT426CFGT40#01.

S5

Elongated WASHLET


YT930#MS

Dual Button Push Plate
#MS Matte Silver

WT173M

This universal height, high-efficiency, dual flushing, in-wall tank system toilet shall be 1.28 GPF/0.9 GPF (4.8 LPF/3.4 LPF). Requires TOTO toilet model CT426CFGT40. In-Wall tank system shall be TOTO Model WT173M.

YT930

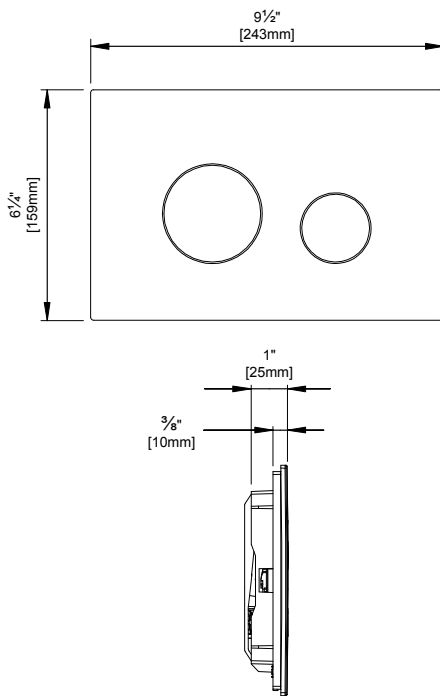


INSTALLATION NOTES

- WT173M**
 Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.

 Recommend to use plywood with a minimum thickness of 1/2" for the wall panel.

WT173MA

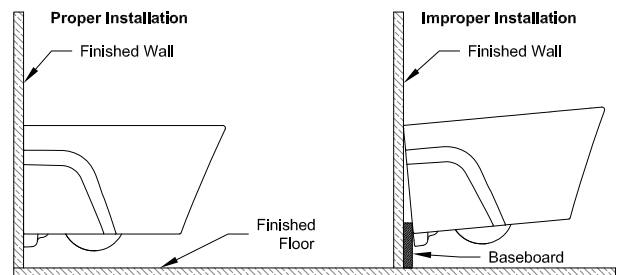

DIMENSIONS

WT173MA

