TOTO_®

MW6443346CEFG

Carolina® II WASHLET®+ S2 One-Piece Toilet - 1.28 GPF

FEATURES

- Concealed supply connection for seamless installation
- High-efficiency TORNADO FLUSH® system 1.28 **GPF (4.8 LPF)**
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Decorative one-piece with skirted design
- **UNIVERSAL HEIGHT**
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S2 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Convenient arm control panel
- Night light illuminates the inside of the bowl

MODELS

MW6443346CEFG (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S2 with contemporary design

- CST644CEFGT40 Elongated bowl with CEFIONTECT
- SW3346 WASHLET+ S2

OPTIONAL COMPONENTS

- **TSU01W.10R** 10" Unifit Rough-In
- **TSU01W.14R** 14" Unifit Rough-In
- THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A

Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

COLORS/FINISHES

#01 Cotton





TORNADO FLUSH



EWATER+





PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF (4.8 LPF). Toilet shall be 12" Unifit rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MW6443346CEFG#01.

See SW3346 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and
- Code compliance: UPC, IPC, NSPC, NPC Canada,
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when installed with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements







SPECIFICATIONS


| Water Use | 1.28 GPF (4.8 LPF) |
|------------------------|---|
| Flush System | TORNADO FLUSH® |
| Water Surface | 6-5/8" x 9-1/8" |
| Trap Diameter | 2-1/8" |
| Rough-in | 12" (10" and 14" options available) |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CST644CEFGT40: 110 lbs SW3346: 16 lbs |
| Shipping Dimensions | CST644CEFGT40 29-1/2" L x 18-1/4" W x 25-1/2" H SW3346 24-3/8" L x 21" W x 7-7/16" H |

See SW3346 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

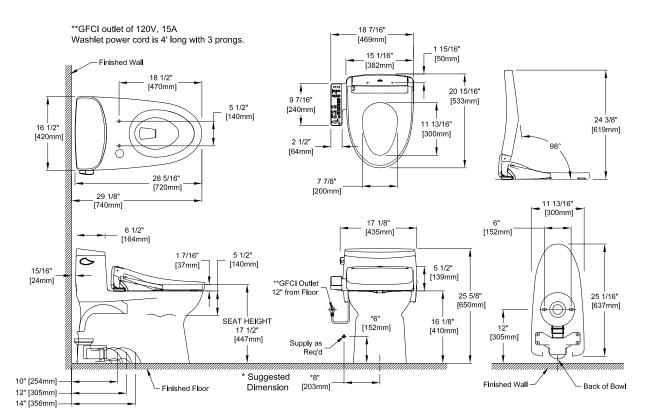



These dimensions and specifications are subject to change without notice