TOTO_®

MW4543446CUFG

Drake® II 1G® WASHLET®+ S5 Two-Piece Toilet - 1.0 GPF

FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency TORNADO FLUSH_® system -1.0 GPF (3.8 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- UNIVERSAL HEIGHT
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl toilet and tank with WASHLET+ S5 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Multifunction remote control with personalized memory settings for up to 4 users
- Night light illuminates the inside of the bowl

MODELS

MW4543446CUFG (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S5 with contemporary design

- C454CUFGT40
 Elongated bowl with CEFIONTECT
- **ST453UA**Tank and cover only
- **SW3446** WASHLET+ S5

OPTIONAL COMPONENTS

 THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A

Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

COLORS/FINISHES

#01 Cotton













PRODUCT SPECIFICATION

The two-piece ultra high-efficiency TORNADO FLUSH toilet shall be 1.0 GPF (3.8 LPF). UNIVERSAL HEIGHT Toilet with CEFIONTECT glaze finish. Toilet shall have high profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model MW4543446CUFG#01.

See SW3446 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when installed with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements







SPECIFICATIONS


Water Use	1.0 GPF (3.8 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	6-3/4" x 8-5/8"
Trap Diameter	2-1/8"
Rough-in	12"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	C454CUFGT40: 57 lbs ST453UA: 28 lbs SW3446: 15.4 lbs
Shipping Dimensions	C454CUFGT40 29" L × 14-3/4" W1 × 11-1/2" W2 × 16-1/4" H ST453UA 18" L × 9" W × 16" H SW3446 24-3/8" L × 17-9/16" W × 7-7/16" H

See SW3446 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES

Back-to-Back Toilet Installations:


TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

It is recommended to have adequate supplemental flows from other water usage fixtures with a drainline slope of 2% with maximum linear runs of 60ft.

DIMENSIONS

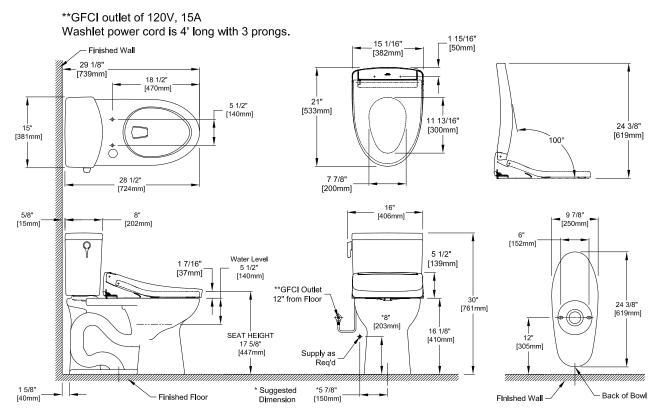



These dimensions and specifications are subject to change without notice