# TOTO<sub>®</sub>

## MW4743446CEFG

## Vespin<sub>®</sub> II WASHLET<sub>®</sub>+ S5 Two-Piece Toilet - 1.28 GPF

## **FEATURES**

- Concealed supply connection for seamless installation
- High-efficiency TORNADO FLUSH® system 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Skirted Design
- UNIVERSAL HEIGHT
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl toilet and tank with WASHLET+ S5 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Multifunction remote control with personalized memory settings for up to 4 users
- Night light illuminates the inside of the bowl

## **MODELS**

MW4743446CEFG (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S5 with contemporary design

- CT474CUFGT40
   Elongated bowl with CEFIONTECT
- **ST454EA**Tank and cover only
- **SW3446** WASHLET+ S5

### OPTIONAL COMPONENTS

 THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A

Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

## **COLORS/FINISHES**

#01 Cotton











#### PRODUCT SPECIFICATION

The two-piece high-efficiency TORNADO FLUSH toilet shall be 1.28 GPF (4.8 LPF). UNIVERSAL HEIGHT Toilet with CEFIONTECT glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model MW4743446CEFG#01.

See SW3446 Specification Sheet for details on included WASHLET.

#### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when installed with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements







#### **SPECIFICATIONS**


| Water Use              | 1.28 GPF (4.8 LPF)   |
|------------------------|--|
| Flush System           | TORNADO FLUSH®   |
| Min. Water Pressure    | 8 psi (Flowing)  |
| Water Surface          | 6-3/4" x 8-5/8"  |
| Trap Diameter          | 2-1/8"   |
| Rough-in               | 12" (10" and 14" options available)  |
| Trap Seal              | 2-1/8"   |
| Warranty               | One Year Limited Warranty  |
| Material               | Vitreous China   |
| Shipping Weight        | CT474CUFGT40: 75 lbs<br>ST454EA: 31 lbs<br>SW3446: 15.4 lbs  |
| Shipping<br>Dimensions | CT474CUFGT40 30-1/8"L×16-3/4"W×22"H ST454EA 18" L×9" W×16" H SW3446 24-3/8" L×17-9/16" W×7-7/16" H |

See SW3446 Specification Sheet for details on included WASHLET.

## **INSTALLATION NOTES**


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

### **DIMENSIONS**

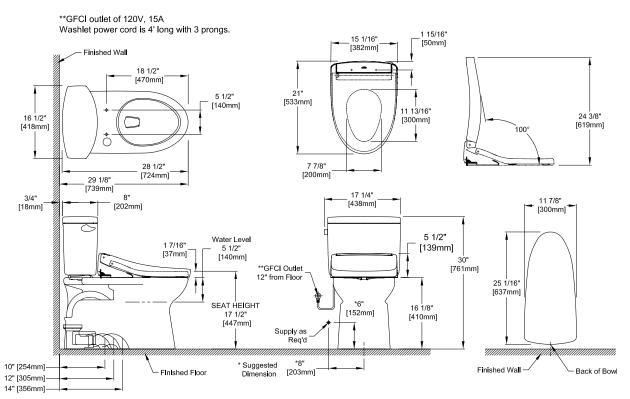

TOTO<sub>®</sub>

These dimensions and specifications are subject to change without notice