

## Touchless Soap Dispenser - Square with Subtank

### FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounting hardware and supply lines
- Single-hole mount
- TOTO Soap required
- Refillable tank system
- IoT-enabled options available to remotely monitor usage rates, soap consumption, fixture performance and streamline operations in real time with instant alerts

### OPTIONAL ACCESSORIES

- **THP3374**  
Mounting bracket for tank

### COLORS/FINISHES

- #CP Polished Chrome

### PRODUCT SPECIFICATION

TOTO Model # \_\_\_\_\_ Product shall be automatic infrared sensor activated. Product shall have automatic sensor adjustment upon installation. Soap dispenser, controller w/ reservoir, and subtank will be sold separately. Product shall have a controller pump with 0.8 gallon (3L) reservoir. Product shall have a 5.3 gallon (20L) subtank.



### CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: IAPMO(cUPC)
- Code Compliance: NEC, CEC
- ADA Compliant
- Compliance with CA Prop 65 warning requirements
- FCC compliant to Part 15



### MODELS

Kit Options	Component Breakdown			
	Spout (xQTY)	Controller & Reservoir	Subtank	IoT Card
<b>TES204AEi#CP</b>	TLK08001G#CP (x2)	TLK01106Ui	TLK01401U	*
<b>TES205AEi#CP</b>	TLK08001G#CP (x3)	TLK01107Ui	TLK01401U	*
<b>TES204AEi4#CP</b>	TLK08001G#CP (x2)	TLK01106Ui	TLK01401U	THP3566
<b>TES205AEi4#CP</b>	TLK08001G#CP (x3)	TLK01107Ui	TLK01401U	THP3566

\*Requires communication card (sold separately) for IoT functionality

# TES20(4/5)AEi Series


## Touchless Soap Dispenser - Square with Subtank

### SPECIFICATIONS

<b>Power Supply</b>	AC 120V
<b>IoT Capacity</b>	IoT-Enabled
<b>Wattage</b>	(TLK01106Ui) 6.5W (TLK01107Ui) 9W
<b>Sensor Detection Range</b>	5-1/8" ~ 7-7/8" (130 ~ 200 mm) Sensor is self-adjusting
<b>Ambient Temperature</b>	34-104°F (1-40°C)
<b>Humidity</b>	Max. 90% RH
<b>Power Cord Length</b>	55" (1.4 m)
<b>Soap Output Volume</b>	0.04 oz (factory setting)
<b>Tank Capacity</b>	Approximately 0.8 gal (3L) Tank Approximately 5.3 gal (20L) Subtank
<b>Warranty</b>	*Three Year Warranty

\* Failure to use TOTO soap will void warranty

### DIMENSIONS

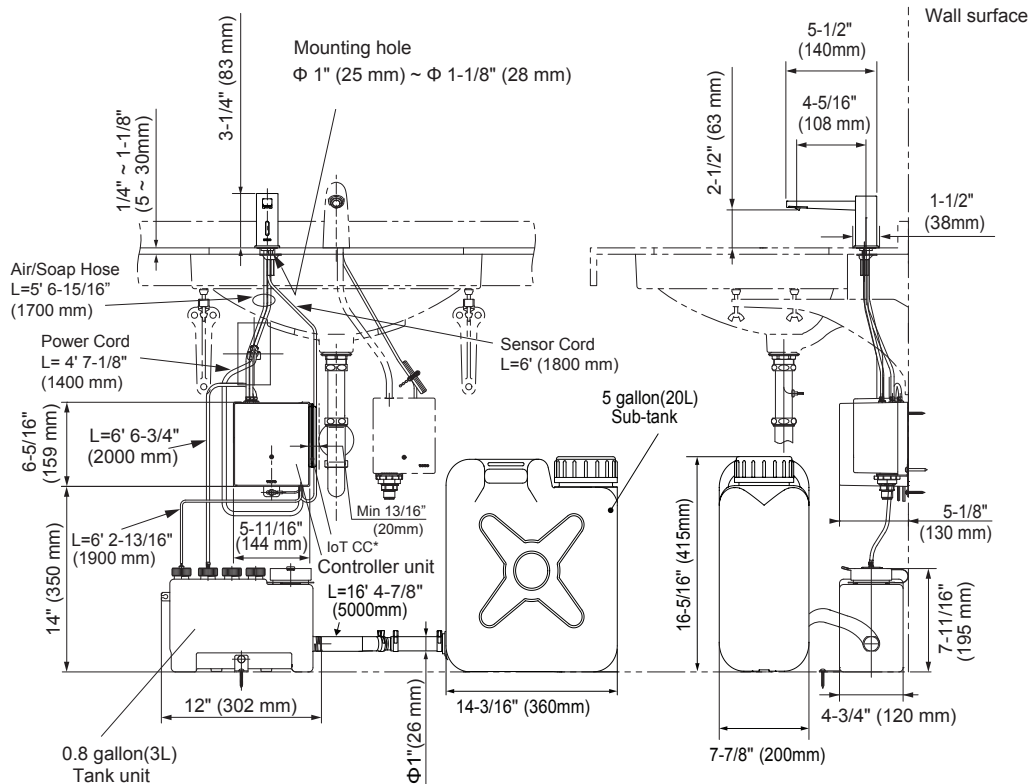

\* Communication Card

### INSTALLATION NOTES

- Spout Mounting Hole  $\varnothing 1'' \sim \varnothing 1\text{-}1/8''$  ( $\varnothing 25 \sim \varnothing 28$  mm)
- Deck Thickness  $1/4'' \sim 1\text{-}1/8''$  ( $5 \sim 30$  mm)
- For IoT installation, provide clearance space on right side of the controller. Minimum clearance to any surrounding structure is  $13/16''$  (20mm) . Recommended clearance is  $3\text{-}15/16''$  (100mm) or more. Please refer to the diagram below.

### TOTO SOAP (Sold Separately)

SKU NO.	QTY	Packaging	Notes
TSFG1	4 gal.	4, 1 gal. ea.	Antibacterial Foam Soap
TSF201	4 gal.	4, 1 gal. ea.	TOTO Foam Hand Soap Green Seal® GS-41
TSF205	5 gal.	1, 5 gal.	TOTO Foam Hand Soap Green Seal® GS-41

**TOTO**

These dimensions and specifications are subject to change without notice