TOTO_®

MW6143446CUFG

Carlyle® II 1G® WASHLET®+ S5 One-Piece Toilet - 1.0GPF

FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency TORNADO FLUSH® system -1.0 GPF (3.8 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Decorative one-piece with skirted design
- UNIVERSAL HEIGHT
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S5 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Multifunction remote control with personalized memory settings for up to 4 users
- Night light illuminates the inside of the bowl

MODELS

MW6143446CUFG (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S5 with contemporary design

- CST614CUFGAT40
 Elongated toilet with CEFIONTECT
- **SW3446** WASHLET+ S5

OPTIONAL COMPONENTS

- TSU01W.10R 10" Unifit Rough-In
- TSU01W.14R 14" Unifit Rough-In
- THU476#MBL Trip Lever - Matte Black

COLORS/FINISHES

#01 Cotton



- One Gallon
 Per Flush
- **EWATER+**
- TORNADO FLUSH
- **U** UNIVERSAL HEIGHT
- **CEFIONTECT**

PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH toilet shall be 1.0 GPF (3.8 LPF). Universal Height Toilet with CEFIONTECT glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model MW6143446CUFG#01.

See SW3446 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC_®), EPA WaterSense_®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when installed with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements







SPECIFICATIONS

| Water Use | 1.0 GPF (3.8 LPF) |
|------------------------|--|
| Flush System | TORNADO FLUSH® |
| Water Surface | 6-7/8" x 9-3/4" |
| Trap Diameter | 2-1/8" |
| Rough-in | 12" (10" and 14" options available) |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CST614CUFGAT40: 106 lbs SW3446: 15.4 lbs |
| Shipping Dimensions | CST614CUFGAT40 30" L x 18-1/4" W x 28-1/4" H1 x 20-3/4" H2 SW3446: 24-3/8" L x 17-9/16" W x 7-7/16" H |


See SW3446 Specification Sheet for details on included WASHLET.

DIMENSIONS

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

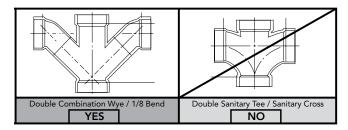

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

It is recommended to have adequate supplemental flows from other water usage fixtures with a drainline slope of 2% with maximum linear runs of 60ft.

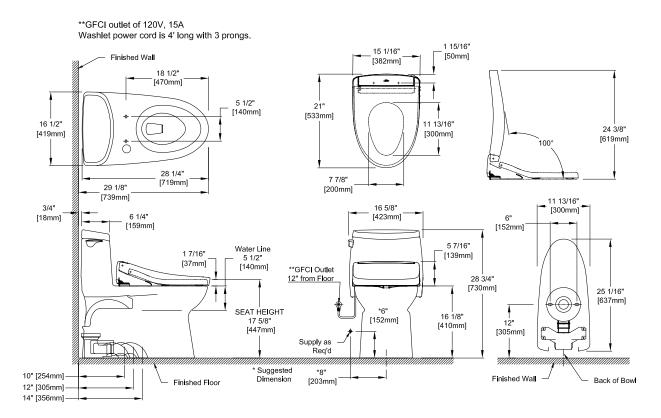



These dimensions and specifications are subject to change without notice