

Glaston™ 1G® Two-Piece Toilet - 1.0 GPF

FEATURES

- Ultra high-efficiency TORNADO FLUSH® system - 1.0 GPF (3.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate WASHLET®+
- Completely skirted design for a sleek and understated look that's easier to clean
- Universal Height
- Elongated front bowl with SoftClose® seat
- 12" Rough-in
- Chrome plated trip lever

MODELS

- **MS472124CUFG (#01, #03, #12)**
With CEFIONTECT ceramic glaze & includes SS124 SoftClose seat
- **MS472124CUF (#51)**
Same as MS472124CUFG without CEFIONTECT

COMPONENTS

- **CT472CUFGT40**
Elongated bowl with CEFIONTECT
- **CT472CUFT40**
Same as CT472CUFGT40 without CEFIONTECT
- **ST472UA**
Tank and cover only
- **SS124**
SoftClose seat

OPTIONAL COMPONENTS

- **TSU10W.10**
10" Unifit Rough-in
- **TSU10W.14**
14" Unifit Rough-in
- **THU887(#01, #BN, #MBL, #PN)-A**
Left Hand Trip Lever (Cotton, Brushed Nickel, Matte Black, Polished Nickel)
- **ST472UR#01**
Tank and cover only with right-hand trip lever

COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #12 Sedona Beige
- #51 Ebony (Without CEFIONTECT glaze)



TORNADO FLUSH



ONE GALLON PER FLUSH



UNIVERSAL HEIGHT



CEFIONTECT



SKIRTED DESIGN

PRODUCT SPECIFICATION

The two-piece ultra high-efficiency TORNADO FLUSH system toilet shall be 1.0 GPF (3.8 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS472124CUF(G)#__.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MS472124CUF(G)

Glaston™ 1G® Two-Piece Toilet - 1.0 GPF


SPECIFICATIONS

| | |
|----------------------------|--|
| Water Use | 1.0 GPF (3.8 LPF) |
| Flush System | TORNADO FLUSH® |
| Min. Water Pressure | 8 psi (Flowing) |
| Water Surface | 9 x 6-1/4" |
| Trap Diameter | 2-1/8" |
| Rough-in | 12" (10" & 14" Optional) |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CT472CUFGT40 75 lbs |
| | ST472UA 31 lbs |
| Shipping Dimensions | CT472CUFGT40 29-7/16" L x 15-1/16" W x 18-3/8" H |
| | ST472UA 18-3/4" L x 8-1/2" W x 16-1/4" H |

INSTALLATION NOTES

Back-to-Back Toilet Installations:


TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

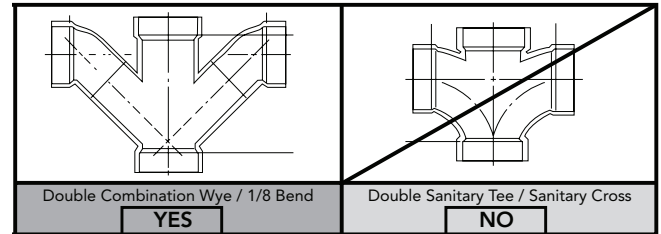

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

It is recommended to have adequate supplemental flows from other water usage fixtures with a drain line slope of 2% with maximum linear runs of 60ft.

DIMENSIONS

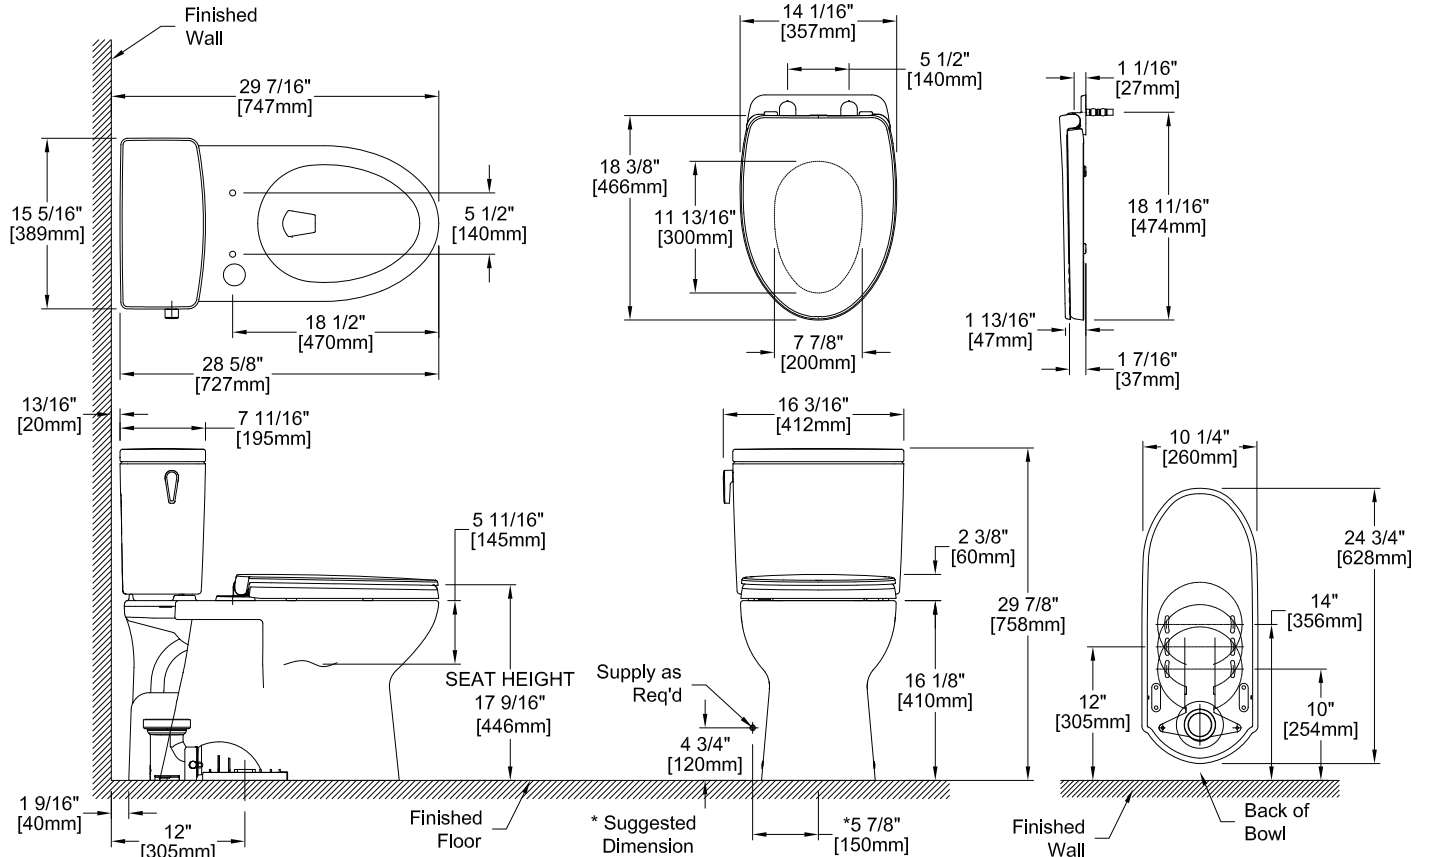

These dimensions and specifications are subject to change without notice