

## Aurora™ One-Piece Toilet - 1.28 GPF

### FEATURES

- INTEGRALITY SYSTEM™ optimizes cleaning power through advanced water flow, ensuring an improved flush performance and enhanced bowl wash with our high-performance TORNADO FLUSH® bowl design - 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate WASHLET®+
- Completely skirted design for a sleek and understated look that's easier to clean
- UNIVERSAL HEIGHT
- Elongated front bowl with SoftClose® seat
- 12" Rough-in
- Chrome plated trip lever

### MODELS

- **MS686234CEFG (#01)**  
With CEFIONTECT ceramic glaze & includes SS234 SoftClose seat

### COMPONENTS

- **CST686CEFGAT40**  
Elongated bowl with CEFIONTECT
- **SS234**  
Slim Elongated SoftClose® seat

### OPTIONAL COMPONENTS

- **TSU49.10**  
10" Unifit Rough-In
- **TSU49.14**  
14" Unifit Rough-In
- **THU897(#BN, #PN, #01, #MBL)-A**  
Trip Lever (Brushed Nickel, Polished Nickel, Cotton, Matte Black)

### COLORS/FINISHES

- #01 Cotton

### PRODUCT SPECIFICATION

The one-piece high-efficiency INTEGRALITY SYSTEM toilet shall be 1.28 GPF. Toilet shall be 12" Unifit rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS686234CEFG#01.



### INTEGRALITY™ SYSTEM



CEFIONTECT



TORNADO FLUSH



SKIRTED DESIGN



UNIVERSAL HEIGHT

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



# MS686234CEFG

## Aurora™ One-Piece Toilet - 1.28 GPF


### SPECIFICATIONS

<b>Water Use</b>	1.28 GPF (4.8 LPF)
<b>Flush System</b>	INTEGRAL GRAVITY SYSTEM™
<b>Min. Water Pressure</b>	15 psi (Flowing) at 2.64 Gal/min
<b>Water Surface</b>	9" x 6-1/4"
<b>Trap Diameter</b>	2-1/2"
<b>Rough-in</b>	12" (10" and 14" options available)
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	132 lbs
<b>Shipping Dimensions</b>	30-7/8" L x 22-5/8" W x 18-1/2" H1 x 29" H2

### INSTALLATION NOTES


#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

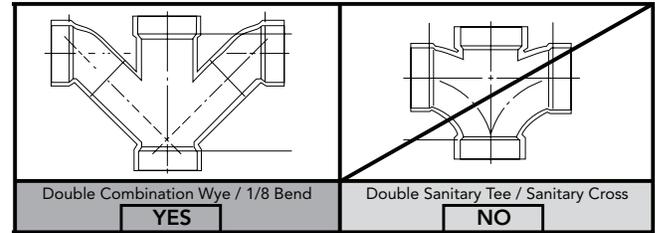

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

### DIMENSIONS

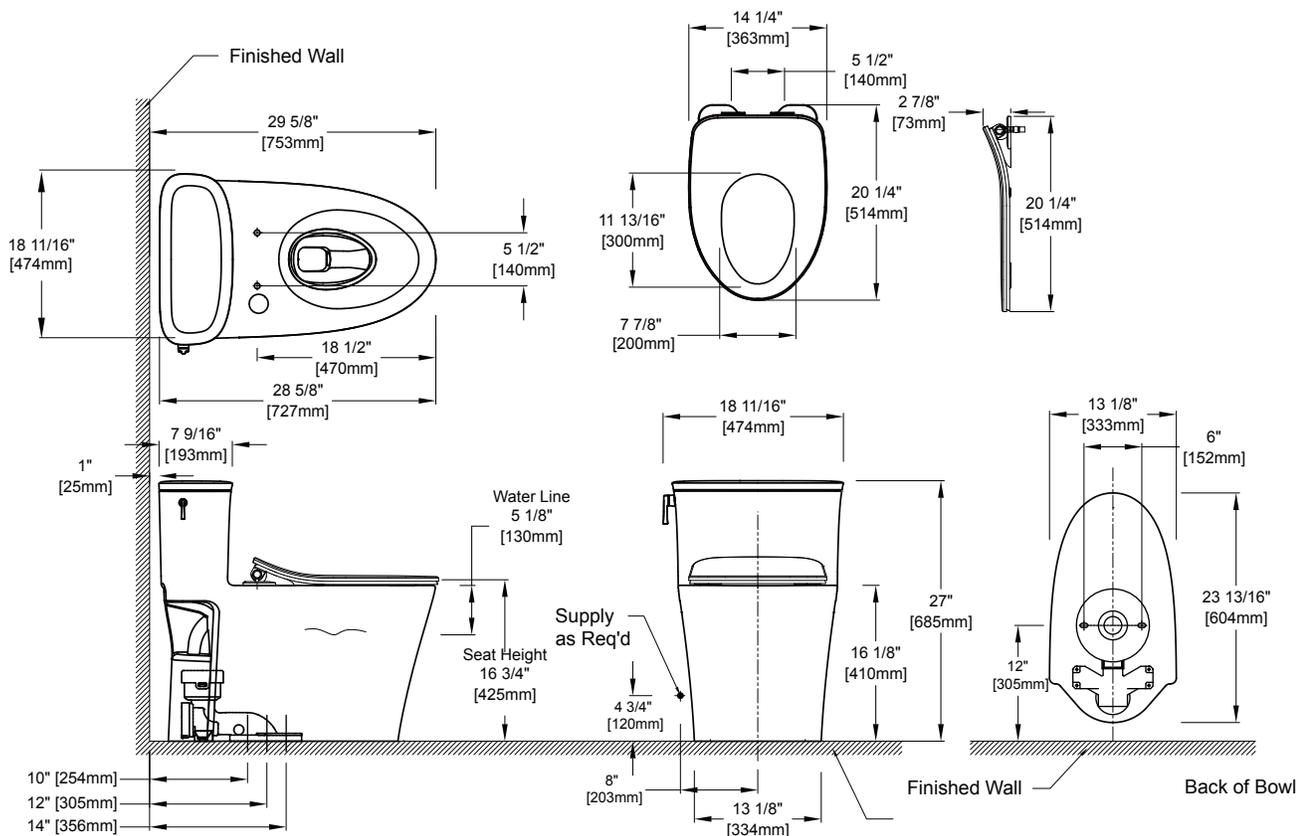

**TOTO**®

These dimensions and specifications are subject to change without notice