

## Drake® II 1G® WASHLET®+ S2 Two-Piece Toilet - 1.0 GPF

### FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency TORNADO FLUSH® system - 1.0 GPF (3.8 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- UNIVERSAL HEIGHT
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl toilet and tank with WASHLET+ S2 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Convenient arm control panel
- Night light illuminates the inside of the bowl

### MODELS

- **MW4543346CUFG (#01)**  
With CEFIONTECT ceramic glaze, WASHLET+ S2 with contemporary design
  - **C454CUFGT40**  
Elongated bowl with CEFIONTECT
  - **ST453UA**  
Tank and cover only
  - **SW3346**  
WASHLET+ S2

### OPTIONAL COMPONENTS

- **THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A**  
Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

### COLORS/FINISHES

- #01 Cotton



**1G** One Gallon Per Flush

**EWATER+**

**TORNADO FLUSH**

**U** UNIVERSAL HEIGHT

**CEFIONTECT**

### PRODUCT SPECIFICATION

The two-piece ultra high-efficiency TORNADO FLUSH toilet shall be 1.0 GPF (3.8 LPF). UNIVERSAL HEIGHT Toilet with CEFIONTECT glaze finish. Toilet shall have high profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model MW4543346CUFG#01.

See SW3346 Specification Sheet for details on included WASHLET.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when installed with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements



**MW4543346CUFG**

**Drake® II 1G® WASHLET®+ S2**  
**Two-Piece Toilet - 1.0 GPF**

## SPECIFICATIONS


|                            |   |
|----------------------------|---|
| <b>Water Use</b>           | 1.0 GPF (3.8 LPF)   |
| <b>Flush System</b>        | TORNADO FLUSH®  |
| <b>Min. Water Pressure</b> | 8 psi (Flowing)   |
| <b>Water Surface</b>       | 6-3/4" x 8-5/8"   |
| <b>Trap Diameter</b>       | 2-1/8"  |
| <b>Rough-in</b>            | 12"   |
| <b>Trap Seal</b>           | 2-1/8"  |
| <b>Warranty</b>            | One Year Limited Warranty   |
| <b>Material</b>            | Vitreous China  |
| <b>Shipping Weight</b>     | <b>C454CUFGT40:</b> 57 lbs<br><b>ST453UA:</b> 28 lbs<br><b>SW3346:</b> 16 lbs   |
| <b>Shipping Dimensions</b> | <b>C454CUFGT40</b><br>29" L x 14-3/4" W1 x 11-1/2" W2 x 16-1/4" H<br><b>ST453UA</b><br>18" L x 9" W x 16" H<br><b>SW3346</b><br>24-3/8" L x 21" W x 7-7/16" H |

See SW3346 Specification Sheet for details on included WASHLET.

## INSTALLATION NOTES

### Back-to-Back Toilet Installations:


TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

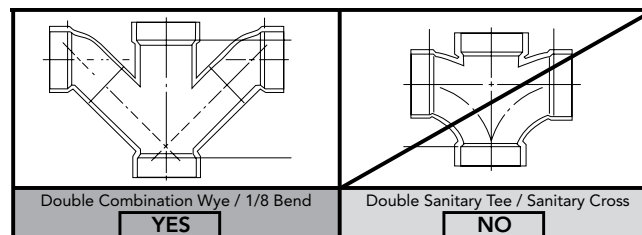

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

It is recommended to have adequate supplemental flows from other water usage fixtures with a drainline slope of 2% with maximum linear runs of 60ft.

## DIMENSIONS

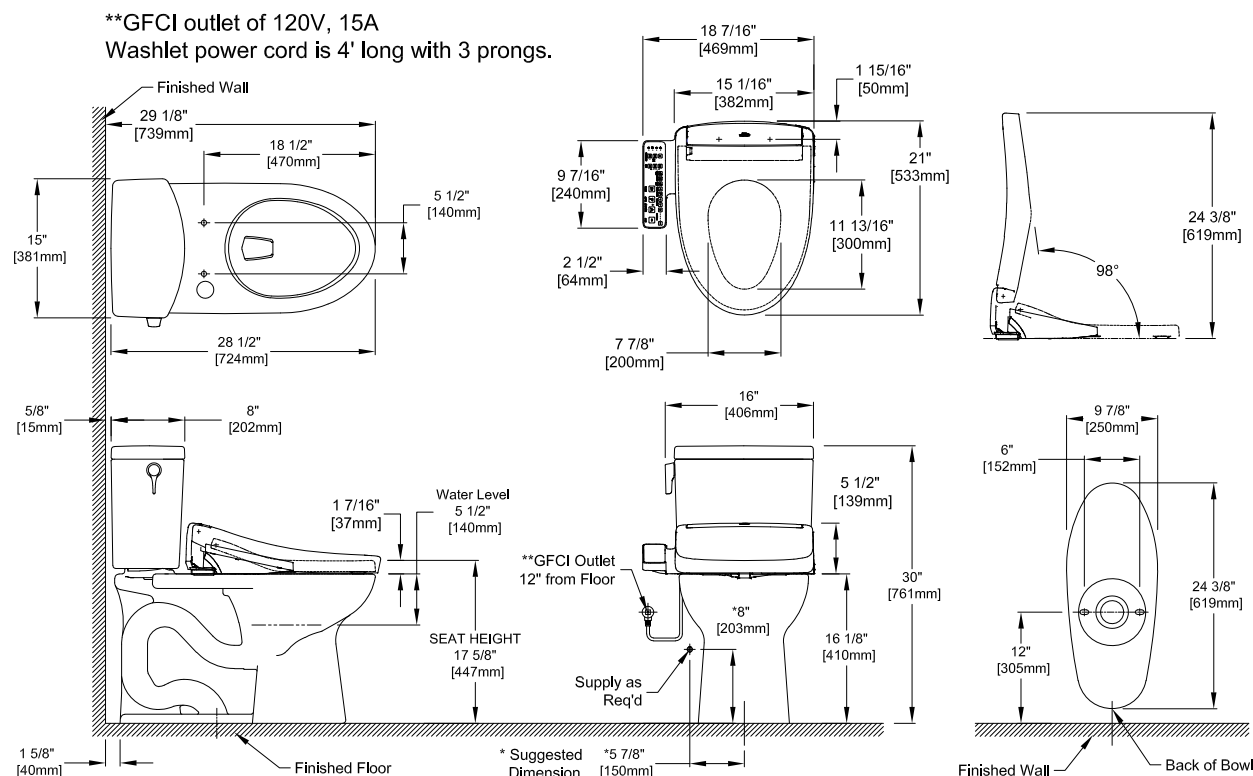

**TOTO®**

These dimensions and specifications are subject to change without notice