

## ECOPOWER® Ultra High-Efficiency Urinal Flush Valve 0.125 GPF

### FEATURES

- 0.125 GPF
- Self-powered hydroelectric flush valve system
- No minimum daily usage requirement
- Durable chrome plated body with tamper-proof screws and solid bronze valve body
- Neutral rough-in and adjustable tail piece connection
- True mechanical flush override
- Smart sensor with self-adjusting detection range
- 6-second detection time to prevent ghost flushing
- Contributes to earning credits in LEED®
- Protects trap seal with a maintenance flush if not used in a 12 hr period
- IoT-enabled options available to remotely monitor usage rates, water consumption, fixture performance and streamline operations in real time with instant alerts

### OPTIONAL ACCESSORIES

- **Z-4000-J**  
Adapter for ground joint angle stops

### COLORS/FINISHES

- #CP Polished Chrome

### MODELS

Kit Options	Component Breakdown		
	Flush Valve	Vacuum Breaker Set	IoT Card
<b>TEU1UAI12#CP</b>	TEU1UAI#CP	VB0912R#CP	*
<b>TEU1UAI4#CP</b>	TEU1UAI#CP		THP3566
<b>TEU1UAI412#CP</b>	TEU1UAI#CP	VB0912R#CP	THP3566

\*Requires communication card (sold separately) for IoT functionality



### PRODUCT SPECIFICATION

TOTO® Model No. \_\_\_\_\_ Product shall be 0.125 GPF. Product shall be an automatic infrared sensor activated, urinal flush valve. Product shall use hydropower, ECOPOWER flush valve system. Product shall have durable chrome plated body with tamper-proof screws and solid bronze valve body. Product shall have neutral rough-in and adjustable tail piece connection. Product shall have smart sensor with self-adjusting detection range. Product shall have true mechanical flush override. Product shall have 6-second detection time to prevent ghost flushing. Product shall have solenoid with self-cleaning mechanism.

### CODES/STANDARDS

- Meets or exceeds ASSE 1037/ASME A112.1037/CSA B125.37
- FCC compliant to Part 15
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Title 20 regulations and CalGreen when used with a 0.125 GPF wall mount urinal
- ADA compliant
- Complies with CA Prop 65 warning requirements



# TEU1UAI Series

## ECOPOWER® Ultra High-Efficiency Urinal Flush Valve 0.125 GPF

### SPECIFICATIONS


<b>Material</b>	Bronze casting
<b>Power Supply</b>	ECOPOWER
<b>IoT Capacity</b>	IoT-Enabled
<b>Sensor Detection Time</b>	Factory setting at six (6) seconds minimum
<b>Sensor Detection Range</b>	Self-adjusting to environment
<b>Discharge Quantity</b>	Preset to 0.125 GPF / 0.47 LPF
<b>Operating Temperature</b>	32-104°F (0-40°C)
<b>Water Source</b>	Tap water (Municipal Supply Only)
<b>Water Supply Pressure</b>	Min: 15 psi (flowing) Max: 125 psi (static)
<b>Water Supply Connection</b>	3/4" NPT
<b>Warranty</b>	Three year limited

\*Water pressures over 80 psi are not recommended for most plumbing fixtures. Check your local plumbing code for details.

### INSTALLATION NOTES

- For commercial applications only.
- Warning: Failure to properly adjust angle stop to the appropriate level can potentially cause property damage.
- For detailed installation instructions, please refer to the installation manual.
- Max flow rate to be used with TEU1UAI\_\_\_\_\_ : 0.125 GPF
- Confirm with local codes and standards for floor drain requirement. Adjust control stop for proper flow rate to the fixture.
- For IoT installation, provide at least 13/16" (20mm) clearance between the back of the flush valve and the wall. Please refer to the diagram below.

### DIMENSIONS

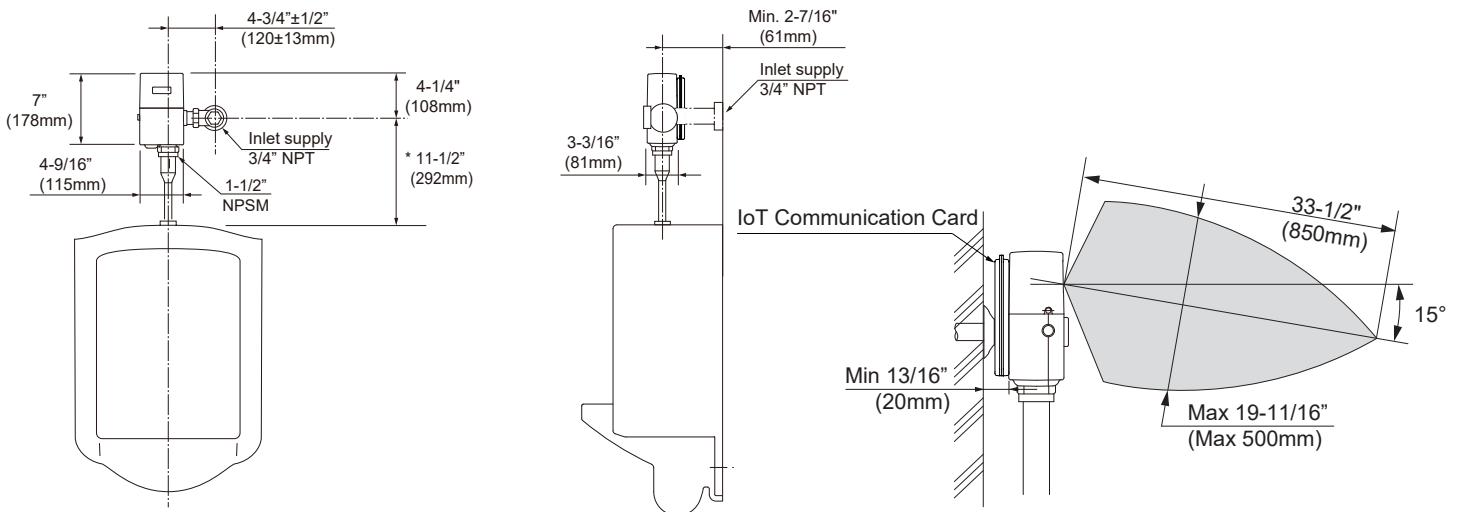

\* Check local codes

**TOTO®**

These dimensions and specifications are subject to change without notice